

---



---

# RESIN BONDED SURFACING

## BASE BUILD UP SPECIFICATIONS

---



---

Follow links below for appropriate specification advice

[Driveways](#)


[Estate Roads](#)

[Pedestrian Areas](#)

# RESIN BONDED SURFACING

## DRIVEWAYS

### Typical Base Build Up

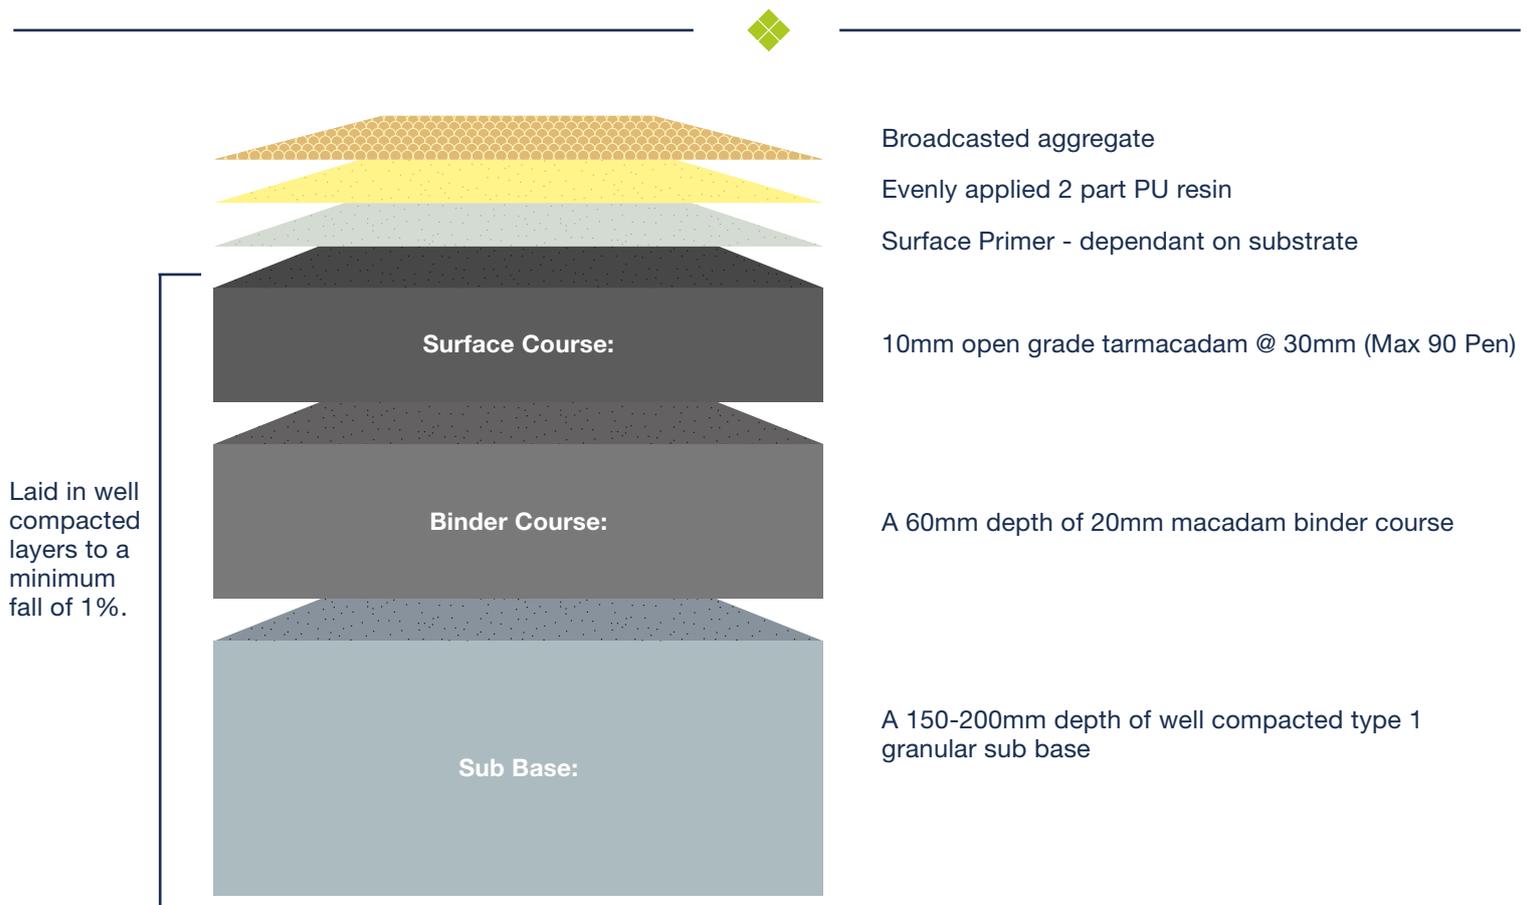

**Allow newly laid surfaces to settle and oxidise for 30 days before applying DekorGrip**

On poor sub-soil or clay, apply a suitable geotextile separating membrane


- ◆ **Purpose:** To provide a seamless, beautiful and textured surface.
- ◆ **Advantages:** An extremely hard wearing surface, offering a natural pleasing appearance of loose aggregate without any of the setbacks that come with loose aggregate surfaces.

The details given in this specification are intended only as a guide in specifying DekorGrip products, actual details should be developed by the project designers taking into account the specific circumstances of the intended application. DekorGrip assumes no responsibility for improper reliance upon or misuse of the data herein. Product design and specification are subject to change without further notice.

# RESIN BONDED SURFACING

## ESTATE ROADS

### Typical Base Build Up

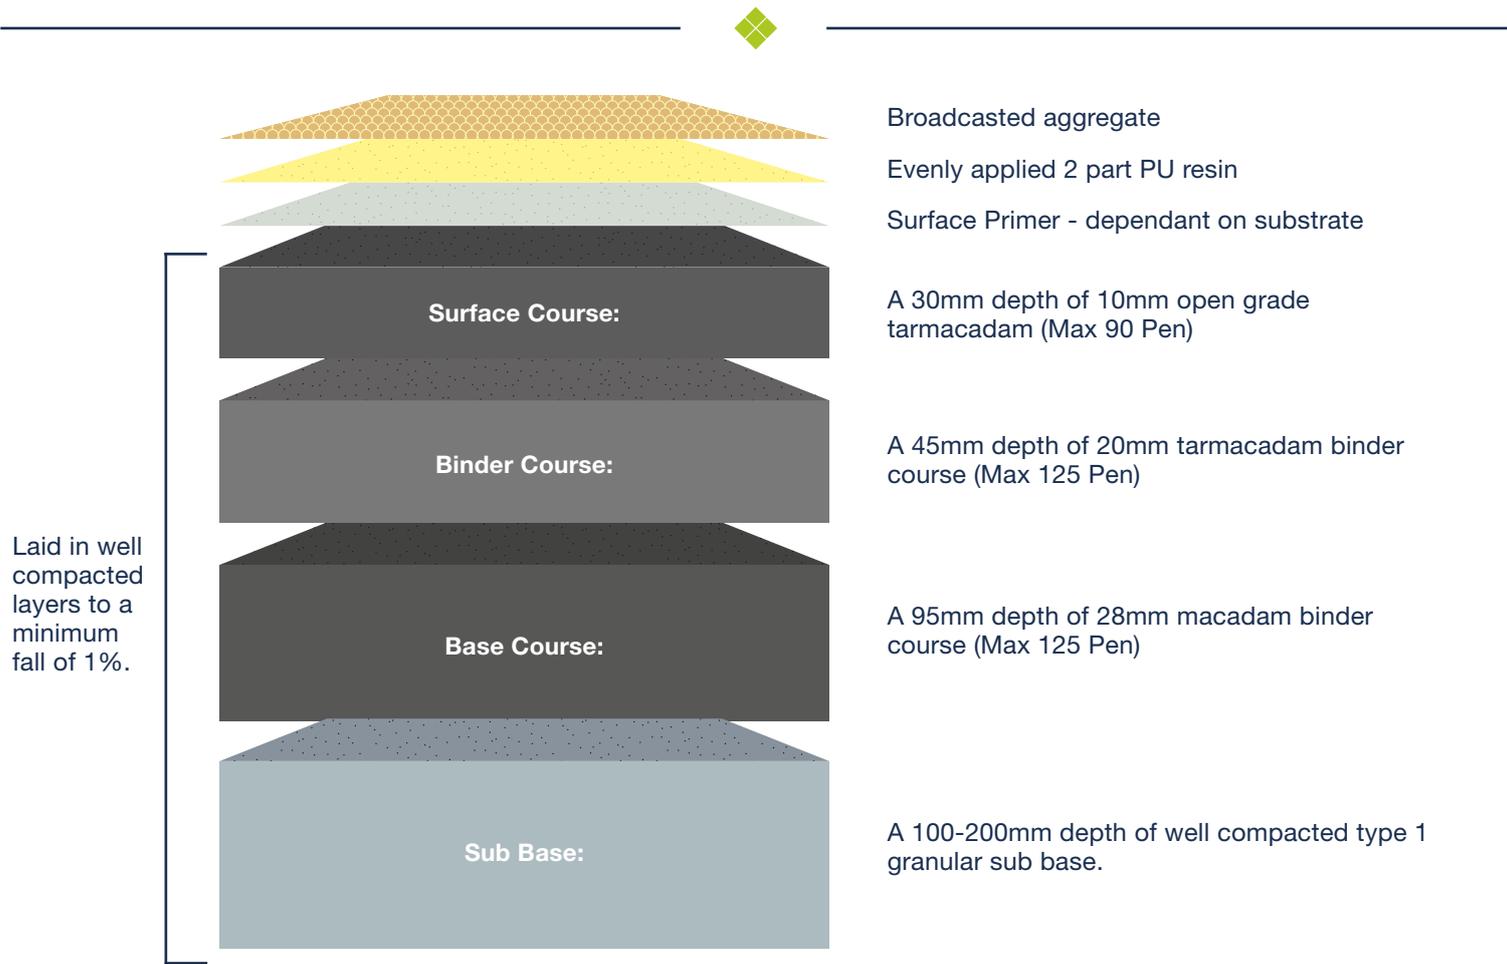

**Allow newly laid surfaces to settle and oxidise for 30 days before applying DekorGrip**

On poor sub-soil or clay, apply a suitable geotextile separating membrane


- ◆ **Purpose:** To provide a seamless, beautiful and textured surface.
- ◆ **Advantages:** An extremely hard wearing surface, offering a natural pleasing appearance of loose aggregate without any of the setbacks that come with loose aggregate surfaces.

The details given in this specification are intended only as a guide in specifying DekorGrip products, actual details should be developed by the project designers taking into account the specific circumstances of the intended application. DekorGrip assumes no responsibility for improper reliance upon or misuse of the data herein. Product design and specification are subject to change without further notice.

# RESIN BONDED SURFACING

## PEDESTRIAN AREAS

### Typical Base Build Up

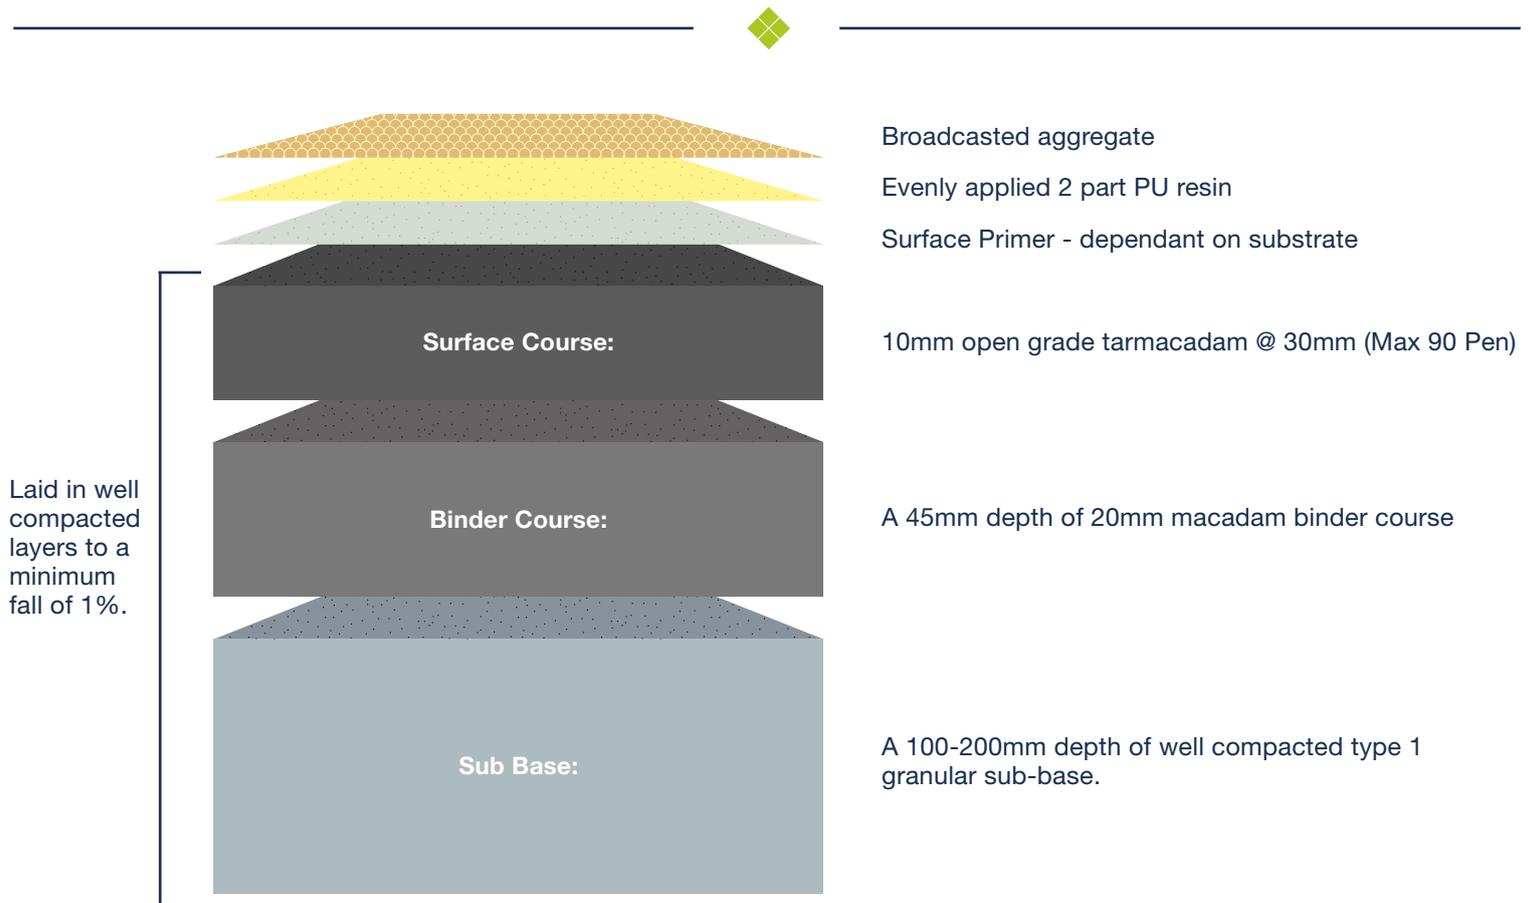

**Allow newly laid surfaces to settle and oxidise for 30 days before applying DekorGrip**

On poor sub-soil or clay, apply a suitable geotextile separating membrane

- ◆ **Purpose:** To provide a seamless, beautiful and textured surface.
- ◆ **Advantages:** An extremely hard wearing surface, offering a natural pleasing appearance of loose aggregate without any of the setbacks that come with loose aggregate surfaces.

The details given in this specification are intended only as a guide in specifying DekorGrip products, actual details should be developed by the project designers taking into account the specific circumstances of the intended application. DekorGrip assumes no responsibility for improper reliance upon or misuse of the data herein. Product design and specification are subject to change without further notice.